

# ROC800-Series Thermocouple Module

The Thermocouple (T/C) Input module provides the ROC800-Series Remote Operations Controller with Series 2 architecture (ROC800) with the ability to monitor various thermocouple sensors.

The T/C module provides four individually isolated differential inputs for measuring B, C, E, J, K, N, R, S, or T type thermocouples. The cold junction compensation circuit is located behind the terminal block.

Each channel contains signal conditioning circuitry, a 24-bit Analog to Digital Converter (ADC), and digital isolator circuitry.

Each channel provides electrical isolation of 85 volts dc (channel to channel/system bus) and surge protection.

A temperature sensor IC measures the PCB board temperature at the terminal block.

The extensive use of current-limiting short-circuit protection and surge protection techniques eliminates the need for fuses on the Input/Output (I/O) modules. This reduces maintenance for remote locations. The I/O modules are self-resetting after a fault clears.

The terminal blocks can accommodate wire sizes 16 to 24 American Wire Gauge (AWG).


The modules each have their own integrated short-circuit protected isolated power supply. This power supply allows the field circuitry to be completely isolated from the backplane and the Central Processor Unit (CPU).

Each module provides isolation from other modules and the backplane, including power and signal isolation.

## Compatibility and Installation

Thermocouple modules can be installed in any module slot on a Series 2 ROC800. Installation and replacement of these modules is easily accomplished by removing the two captive screws accessible from the front of the unit.


T/C modules are both hot-swappable (they can be removed and another module of the same kind installed when the unit is powered) and hot-pluggable (they can be installed directly into unused module slots when the unit is powered).

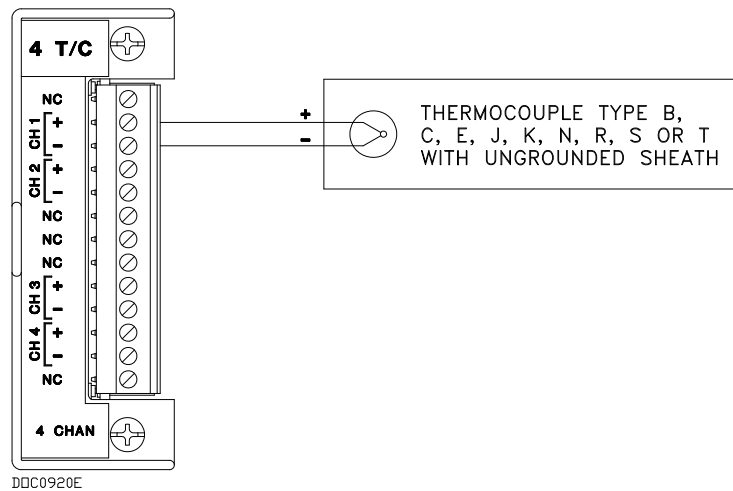

Thermocouple Wiring

**ROC800-Series Thermocouple Module**

**Field Wiring Terminals**

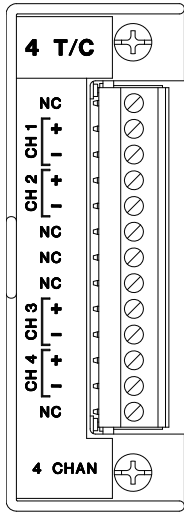

DDC0924A

Terminal	Definition
1	Not Used
2	Positive Analog Input 1
3	Negative Analog Input 1
4	Positive Analog Input 2
5	Negative Analog Input 2
6	Not Used
7	Not Used
8	Not Used
9	Positive Analog Input 3
10	Negative Analog Input 3
11	Positive Analog Input 4
12	Negative Analog Input 4
13	Not Used

**Input**

Quantity	4 channels
Type	Differential
Input Configuration	Thermocouple type B, C, E, J, K, N, R, S, or T
Voltage Input Impedance	10 MΩ
Input Current	75 μA max
Input Common Mode Range	85 Vdc between channels
Electrical Isolation	85 Vdc channel to channel and channels to system bus
Surge Suppression	30 V transorb between signal and ground Meets IEEE 472-1978 specifications
Common Mode Rejection	120 dB
Normal Mode Rejection	65 dB
Conversion Time	66 milliseconds
Input Accuracy	Input accuracy consists of Absolute Accuracy + Cold Junction Compensation Effect. Absolute Accuracy and Cold Junction Compensation Effect values are given in the following tables:

Absolute Accuracy	Input Type	Process Temperature	25 °C	-40°C to 75°C
B - Thermocouple		100°C to 200°C	±8°C	±16°C
		201°C to 390°C	±4°C	±8°C
		391°C to 840°C	±2°C	±4°C
		841°C to 1800°C	±1°C	±2°C
C - Thermocouple		0°C to 2315°C	±0.75°C	±1.5°C
E - Thermocouple		-270°C to -260°C	±3°C	±6°C
		-259°C to -225°C	±1°C	±2°C
		-224°C to -201°C	±0.75°C	±1.5°C
		-200°C to 1000°C	±0.5°C	±1°C
J - Thermocouple		-210°C to 190°C	±0.75°C	±1.5°C
		191°C to 1200°C	±0.5°C	±1°C
K - Thermocouple		-270°C to -261°C	±5°C	±10°C
		-260°C to -246°C	±2°C	±4°C
		-245°C to -180°C	±1°C	±2°C
		-179°C to -145°C	±0.75°C	±1.5°C
		-144°C to 1372°C	±0.5°C	±1°C
N - Thermocouple		-270°C to -260°C	±8°C	±16°C
		-259°C to -250°C	±4°C	±8°C
		-249°C to -230°C	±2°C	±4°C
		-229°C to -150°C	±1°C	±2°C
		-149°C to 1300°C	±0.5°C	±1°C
R - Thermocouple		-50°C to 50°C	±2°C	±4°C
		51°C to 1720°C	±1°C	±2°C
S - Thermocouple		-50°C to 50°C	±2°C	±4°C
		51°C to 1760°C	±1°C	±2°C
T - Thermocouple		-270°C to -261°C	±4°C	±8°C
		-260°C to -251°C	±2°C	±4°C
		-250°C to -181°C	±1°C	±2°C
		-180°C to -136°C	±0.75°C	±1.5°C
		-135°C to 400°C	±0.5°C	±1°C

**Note:** Absolute accuracy includes: linearity, hysteresis, repeatability, stability, gain, and offset error.

Cold Junction Compensation Effect	Input Type	Process Temperature	25 °C
	B - Thermocouple	100°C to 1820°C	±0.5°C
	C - Thermocouple	0°C to 2315°C	±0.54°C
	E - Thermocouple	-270°C to -260°C -259°C to -245°C -244°C to -200°C -199°C to -87°C -86°C to 25°C 24°C to 1000°C	±15.3°C ±4.4°C ±1.7°C ±1.2°C ±0.6°C ±0.5°C
	J - Thermocouple	-210°C to -111°C -110°C to 25°C 26°C to 1200°C	±1.4°C ±0.6°C ±0.5°C
	K - Thermocouple	-270°C to -261°C -260°C to -247°C -246°C to -221°C -220°C to -160°C -159°C to 25°C 26°C to 1372°C	±20.5°C ±6.9°C ±4.1°C ±1.2°C ±0.8°C ±0.5°C
	N - Thermocouple	-270°C to -261°C -260°C to -250°C -249°C to -231°C -230°C to -189°C -188°C to -71°C -71°C to 25°C 26°C to 1300°C	±27°C ±6.8°C ±4.5°C ±2.7°C ±0.84°C ±0.6°C ±0.5°C
	R - Thermocouple	-50°C to 50°C 51°C to 1720°C	±1.0°C ±0.43°C
	S - Thermocouple	-50°C to 50°C 51°C to 1760°C	±0.8°C ±0.5°C
	T - Thermocouple	-270°C to -261°C -260°C to -243°C -242°C to -196°C -195°C to -61°C -60°C to 25°C 26°C to 400°C	±10.3°C ±5.1°C ±3.4°C ±1.2°C ±0.6°C ±0.5°C
	<b>Note:</b> The cold junction compensation does not include any variation between the measured PC board temperature and the actual terminal block junction temperature.		

<b>Power</b>		
Consumption	Main power supply loading at the battery terminals (at 12.0 Vdc)	54 mA typical
<b>Physical</b>		
Dimensions	26 mm W by 75 mm H by 133 mm D (1.03 in. W by 2.96 in. H by 5.24 in. D)	
Weight	108 g (3.8 oz)	
Terminations	13-pin removable terminal blocks	
Wiring	Size 16 to 24 AWG at the removable terminal blocks	
<b>Environmental</b>		
Same as the ROC800-Series in which it is installed		
<b>Approvals</b>		
Same as the ROC800-Series in which it is installed		

Headquarters:

**Emerson Process Management**  
Remote Automation Solutions  
6005 Rogerdale Road  
Houston, TX 77072 U.S.A.  
T +1 281 879 2699 | F +1 281 988 4445  
[www.EmersonProcess.com/Remote](http://www.EmersonProcess.com/Remote)

Europe:

**Emerson Process Management**  
Remote Automation Solutions  
Emerson House  
Kirkhill Drive Kirkhill Industrial Estate  
Aberdeen UK AB21 OEU  
T +44 1224 215700 | F +44 1224 215799  
[www.EmersonProcess.com/Remote](http://www.EmersonProcess.com/Remote)

North American/Latin America:

**Emerson Process Management**  
Remote Automation Solutions  
6005 Rogerdale Road  
Houston TX USA 77072  
T +1 281 879 2699 | F +1 281 988 4445  
[www.EmersonProcess.com/Remote](http://www.EmersonProcess.com/Remote)

Middle East/Africa:

**Emerson Process Management**  
Remote Automation Solutions  
Emerson FZE  
P.O. Box 17033  
Jebel Ali Free Zone – South 2  
Dubai U.A.E.  
T +971 4 8118100 | F +971 4 8865465  
[www.EmersonProcess.com/Remote](http://www.EmersonProcess.com/Remote)

Asia-Pacific:

**Emerson Process Management**  
Remote Automation Solutions  
1 Pandan Crescent  
Singapore 128461  
T +65 6777 8211 | F +65 6777 0947  
[www.EmersonProcess.com/Remote](http://www.EmersonProcess.com/Remote)

© 2012 Remote Automation Solutions, a business unit of Emerson Process Management. All rights reserved.

Bristol, Inc., Bristol Canada, BBI SA de CV and Emerson Process Management Ltd, Remote Automation Solutions (UK), are wholly owned subsidiaries of Emerson Electric Co. doing business as Remote Automation Solutions, a business unit of Emerson Process Management. FloBoss, ROCLINK, Bristol, Bristol Babcock, ControlWave, TeleFlow and Helicoid are trademarks of Remote Automation Solutions. AMS, PlantWeb and the PlantWeb logo are marks of Emerson Electric Co. The Emerson logo is a trademark and service mark of the Emerson Electric Co. All other marks are property of their respective owners.

The contents of this publication are presented for informational purposes only. While every effort has been made to ensure informational accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. Remote Automation Solutions reserves the right to modify or improve the designs or specifications of such products at any time without notice. All sales are governed by Remote Automation Solutions' terms and conditions which are available upon request. Remote Automation Solutions does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Remote Automation Solutions product remains solely with the purchaser and end-user.