



Oval Gear Transmitter High Flow

Model OGT-HF, 1 inch

DESCRIPTION

The Model OGT High Flow meter is designed to handle flow rates up to 30 gpm (115 lpm). The meter is designed specifically to dispense motor oils (SAE 5...50), gear oils (SAE 80...240), automatic transmission fluid, antifreeze (Ethylene Glycol) and engine coolant. Modular design, compact foot print, and rugged design make the OGT the best choice for automated dispensing systems.

The transmitter mounted on the meter can be wired to batch controllers, remote counters and other electronically operated instruments that can accept pulses from a reed switch and have scaling capabilities. The oval gear transmitter is contained in a plastic housing.

OPERATION

As fluid passes through the metering chamber by entering the inlet port, the internal gears rotate forcing the fluid to exit through the outlet port. Each rotation of the gear displaces a given volume of fluid. Controlled clearances between the gears and chamber wall minimize leakage.

As the gears rotate, a magnet on each end of the gear causes the reed switch to open and close. Contact closures from the switch are transmitted to a remote batch controller or counter.

APPLICATIONS

This transmitter is normally connected to metering systems that have scaling capabilities and that can accept a reed switch pulse.

Typical applications are automated motor oil batching systems, antifreeze dispensing systems and other applications that require totalizing meter flow and monitoring rate of fluid flow passing through the meter.

NOTE: The use of meters in applications other than those described in this material may result in inaccuracy and possible meter failure. This meter is designed for petroleum-based products. It is also important that fluids be properly filtered before entering the meter. Foreign particles will cause inaccuracy or malfunction of the meter. Warranties are void in the circumstances described above.



FEATURES

- 1 inch threads (NPT or BSP available)
- Compact foot print
- Oval gear driven meter
- Does not require external power
- Rugged, corrosion resistant plastic enclosure
- Hermetically sealed reed switch output
- Humidity and moisture resistant transmitter
- Compatible with most flow controllers and counters with scaling capabilities
- Accuracy to $\pm 0.75\%$



SPECIFICATIONS


Maximum Flow *	30 gpm (115 lpm)
Minimum Flow *	0.80 gpm (3.0 lpm)
Operating Pressure (Maximum)	1500 psi (103 bar)
Operating Pressure (Minimum)	5 psi (0.35 bar)
Operating Temperature (Maximum)	140° F (60° C)
Operating Temperature (Minimum)	-20° F (-30° C)
Accuracy	± 0.75%
Weight	1.8 lb (0.82 kg)
Inlet & Outlet Connections	1" NPTF (1" BSPP)
Reed Switch Rating	120V AC @10 Watts

Pulses Per Unit


Unit of Measure	Pulses
Liter	66.75
Gallon	252.68
Quart	63.17

*Tested with Mobile DTE-25 motor oil at ambient temperature. Minimum/maximum flow rates will vary with fluid viscosity.

Pressure Drop Chart

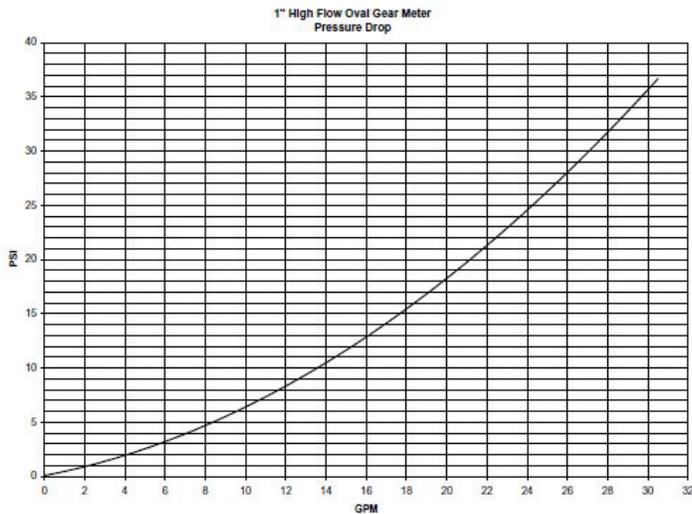

DIMENSIONS

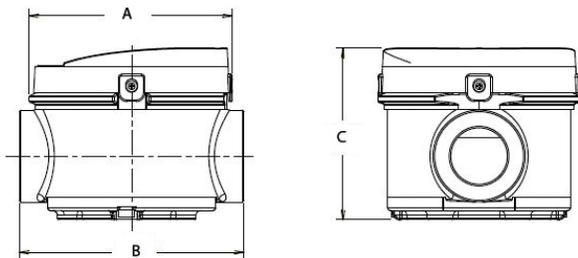

Dimension	Size
A	3.90 in. (99 mm)
B	4.30 in. (109 mm)
C	3.29 in. (84 mm)

Control. Manage. Optimize.

Trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2016 Badger Meter, Inc. All rights reserved.

www.badgermeter.com

The Americas | Badger Meter | 4545 West Brown Deer Rd | PO Box 245036 | Milwaukee, WI 53224-9536 | 800-876-3837 | 414-355-0400
 México | Badger Meter de las Americas, S.A. de C.V. | Pedro Luis Ogazón N°32 | Esq. Angelina N°24 | Colonia Guadalupe Inn | CP 01050 | México, DF | México | +52-55-5662-0882
 Europe, Middle East and Africa | Badger Meter Europa GmbH | Nurtinger Str 76 | 72639 Neuffen | Germany | +49-7025-9208-0
 Europe, Middle East Branch Office | Badger Meter Europe | PO Box 341442 | Dubai Silicon Oasis, Head Quarter Building, Wing C, Office #C209 | Dubai / UAE | +971-4-371 2503
 Czech Republic | Badger Meter Czech Republic s.r.o. | Mařikova 2082/26 | 621 00 Brno, Czech Republic | +420-5-41420411
 Slovakia | Badger Meter Slovakia s.r.o. | Racianska 109/B | 831 02 Bratislava, Slovakia | +421-2-44 63 83 01
 Asia Pacific | Badger Meter | 80 Marine Parade Rd | 21-06 Parkway Parade | Singapore 449269 | +65-63464836
 China | Badger Meter | 7-1202 | 99 Hangzhong Road | Minhang District | Shanghai | China 201101 | +86-21-5763 5412